

Series  
**VENTS KSA**



Centrifugal fans in heat-and sound-insulated casing with the air flow up to **850 m³/h**

■ **Applications**

KSA fan design enables their application in supply and exhaust ventilation systems for the premises with high noise level requirements. Suitable for connection with Ø 100, 125, 150, 160 and 200 mm round ducts.

■ **Design**

The fan casing is made of aluzinc. Heat- and sound-insulating layer is made of polystyrene foam.

■ **Motor**

The impeller with forward curved blades made of galvanized steel is powered by 2- or 4-pole external rotor asyn-

chronous motor. The motor is equipped with the ball bearings for long service life. For precise features, safe operation and low noise, each impeller is dynamically balanced while assembly. Motor protection rating IP44.

■ **Speed control**

Smooth or step speed control with a thyristor or autotransformer speed controller. Several fans may be connected to one speed controller provided that the total power and operating current do not exceed the rated speed controller parameters.

■ **Mounting**

Connection pipes have round section. The fan basic delivery set includes a power cord without an electrical plug. Electric connection and mounting shall be performed in compliance with the operation manual and wiring diagram.

■ **The fan with electronic temperature and control module (U option).**

The ideal solution for ventilation of the premises requiring permanent temperature control, i.e. greenhouses. The fan with the electronic temperature and speed control module provides automatic control of the motor speed (air flow) depending on air temperature in the air duct or in the room.

The front panel of the electronic module has the following control knobs:

- speed control knob for setting the motor speed;
- thermostat control knob for setting the temperature set point;
- thermostat indicator light.

The fan is available in two modifications:

- with the temperature sensor integrated inside the fan air duct (U/U1/U2 option);
- with the external temperature sensor fixed on the cable, 4 m long (Un/U1n/U2n).

■ **Control logic of the fan with the electronic temperature and speed control module.**


Set the desired air temperature (thermostat set point) by turning the thermostat control knob. Set the required minimum impeller speed (air flow) by turning the speed control knob. The motor switches to maximum speed (maximum air flow) as the temperature reaches and exceeds the set temperature set point. The motor switches to the pre-set lower speed as the temperature drops down below the temperature set point. To avoid frequent motor speed switches when the air temperature in the duct is equal to the set temperature point, the speed switch delay is activated. There are three switch delay patterns for various cases:

1. The temperature sensor-based switch delay (U option): the motor switches to higher speed as the air temperature exceeds 2 °C above the set thermostat set point. The motor reverts to the preset lower speed as the air temperature drops below the thermostat set point. This pattern is used to keep air temperature to within 2 °C. In this case the motor speed switches are rare.
2. The timer-based switch delay (U1 option): as the air temperature exceeds the set thermostat set point, the motor switches to higher speed and the switch delay timer is activated for 5 min. The motor reverts to lower speed as the air temperature drops down below the thermostat set point and only after 5 minutes timer countdown. This pattern is used for exact air temperature control. The speed switches for the fan with U1 option are more frequent as compared to the operating logic of the fan with U option, however the minimum operating cycle at one speed is 5 minutes.
3. Switching ON/OFF by a temperature sensor (U2 option): when the air temperature exceeds by 2 °C the thermostat actuation set point, the fan starts operating at the set speed. The fan switches off when the temperature drops below the temperature set point.

**Designation key**

Series	Spigot diameter	Motor		Options
		Polarity	Phase	
<b>VENTS KSA</b>	100; 125; 150; 160; 200	2, 4	<b>E:</b> single phase	<p><b>U:</b> speed controller with an electronic thermostat and a temperature sensor integrated inside an air duct. Temperature-based operation logic.</p> <p><b>Un:</b> speed controller with an electronic thermostat and a temperature sensor fixed on a 4-meter cable. Temperature-based operation logic.</p> <p><b>U1:</b> speed controller with an electronic thermostat and a temperature sensor integrated inside an air duct. Timer-based operation logic.</p> <p><b>U1n:</b> speed controller with an electronic thermostat and a temperature sensor fixed on a 4-meter cable. Timer-based operation logic.</p> <p><b>U2:</b> speed controller with an electronic thermostat and a temperature sensor integrated inside an air duct. Temperature-based switching on/off.</p> <p><b>U2n:</b> speed controller with an electronic thermostat and a temperature sensor fixed on a 4-meter cable. Temperature-based switching on/off.</p> <p><b>R1:</b> power cord with a mains plug.</p> <p><b>P:</b> integrated smooth speed controller.</p>

**Accessories**

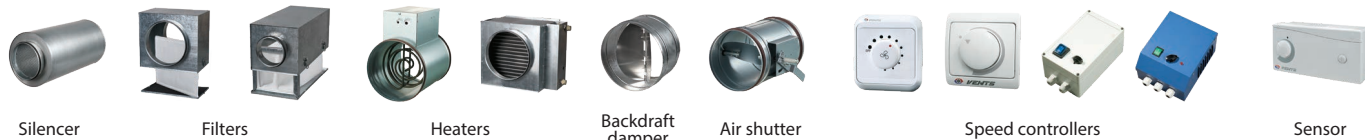

### Technical data


	KSA 100-2E	KSA 125-2E	KSA 150-2E
Voltage [V/50 Hz]	1~230	1~230	1~230
Power [W]	115	120	260
Current [A]	0.51	0.52	1.16
Max. air flow [m <sup>3</sup> /h]	400	530	730
RPM [min <sup>-1</sup> ]	2650	2650	2600
Noise level at 3 m [dBA]	36.1	38.3	39.4
Transported air temperature [°C]	-25 +40	-25 +40	-25 +40
SEC class	C	C	C
Protection rating	IPX4	IPX4	IPX4

### Technical data


	KSA 160-2E	KSA 200-4E
Voltage [V/50 Hz]	1~230	1~230
Power [W]	260	110
Current [A]	1.16	0.45
Max. air flow [m <sup>3</sup> /h]	730	850
RPM [min <sup>-1</sup> ]	2600	1300
Noise level at 3 m [dBA]	37.9	29.1
Transported air temperature [°C]	-25 +40	-25 +40
SEC class	C	B
Protection rating	IPX4	IPX4

### Fan overall dimensions

Type	Dimensions [mm]					Mass [kg]
	∅D	B	H	L	P	
KSA 100-2E	99	184	308	310	48	4.22
KSA 125-2E	123	204	308	310	48	4.57
KSA 150-2E	148	231	343	358	48	6.28
KSA 160-2E	158	231	343	358	48	6.28
KSA 200-4E	198	282	408	445	48	8.25

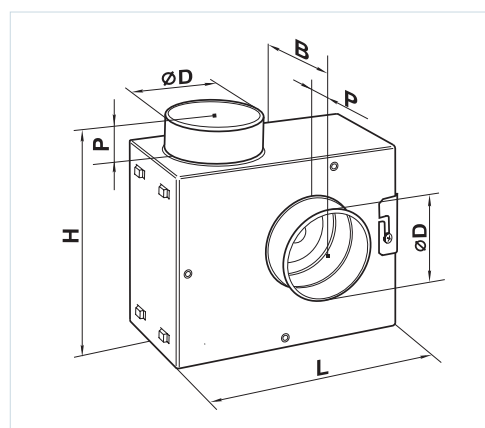


VENTS KSA

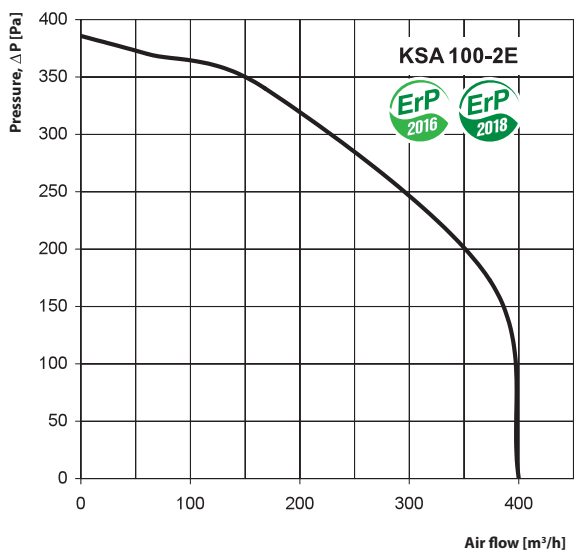


Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L <sub>WA</sub> to inlet	dBA	47	44	41	42	37	35	35	30	29
L <sub>WA</sub> to outlet	dBA	50	45	41	41	37	35	31	30	28
L <sub>WA</sub> to environment	dBA	43	39	36	37	31	30	28	25	22

VENTS KSA

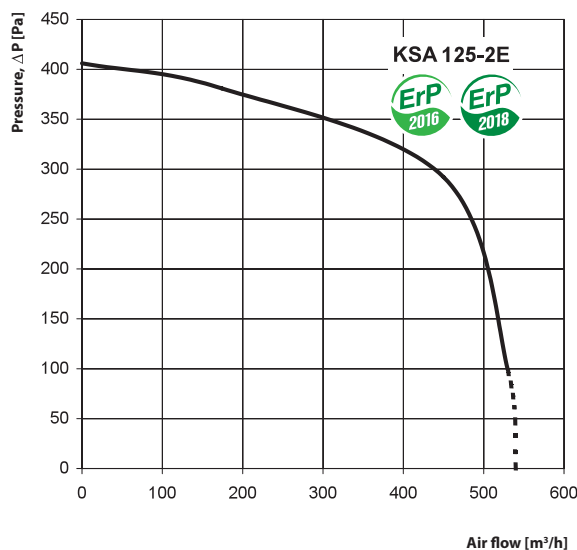

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L <sub>WA</sub> to inlet	dBA	48	45	44	46	37	39	33	30	25
L <sub>WA</sub> to outlet	dBA	50	45	43	47	39	39	33	29	27
L <sub>WA</sub> to environment	dBA	45	40	39	41	34	33	27	23	22

VENTS KSA

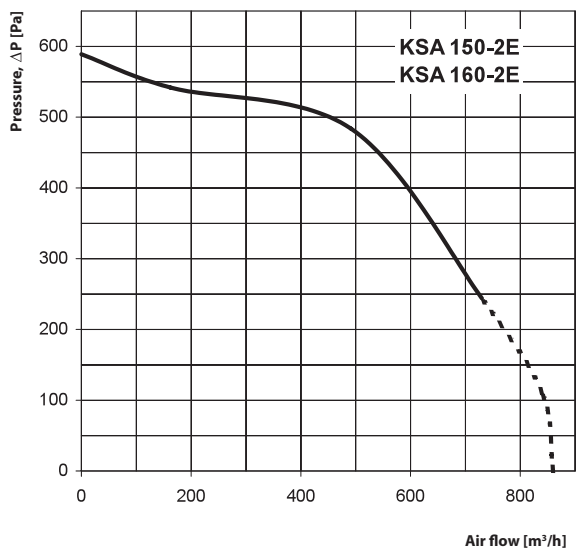


Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L <sub>WA</sub> to inlet	dBA	55	42	52	50	40	35	28	25	21
L <sub>WA</sub> to outlet	dBA	55	43	51	48	40	34	29	23	23
L <sub>WA</sub> to environment	dBA	50	39	48	44	35	30	25	20	17


  

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L <sub>WA</sub> to inlet	dBA	56	44	51	48	38	33	29	24	22
L <sub>WA</sub> to outlet	dBA	54	42	51	50	37	31	30	25	25
L <sub>WA</sub> to environment	dBA	49	37	47	43	34	28	25	20	18

VENTS KSA

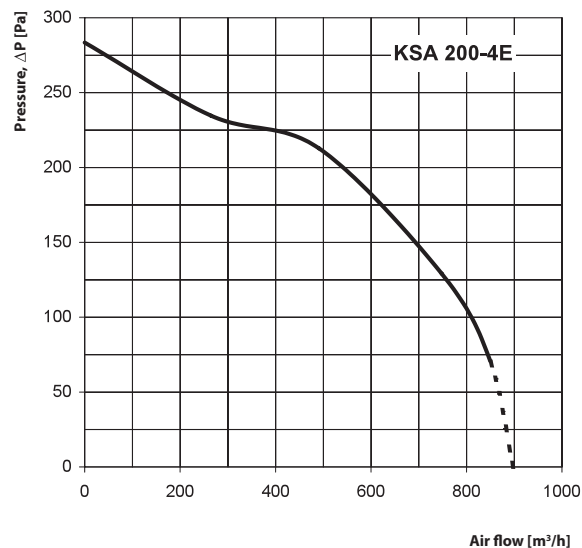

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L <sub>WA</sub> to inlet	dBA	43	39	38	38	31	29	20	17	14
L <sub>WA</sub> to outlet	dBA	43	36	38	34	34	27	23	18	18
L <sub>WA</sub> to environment	dBA	38	33	35	31	27	22	16	13	11

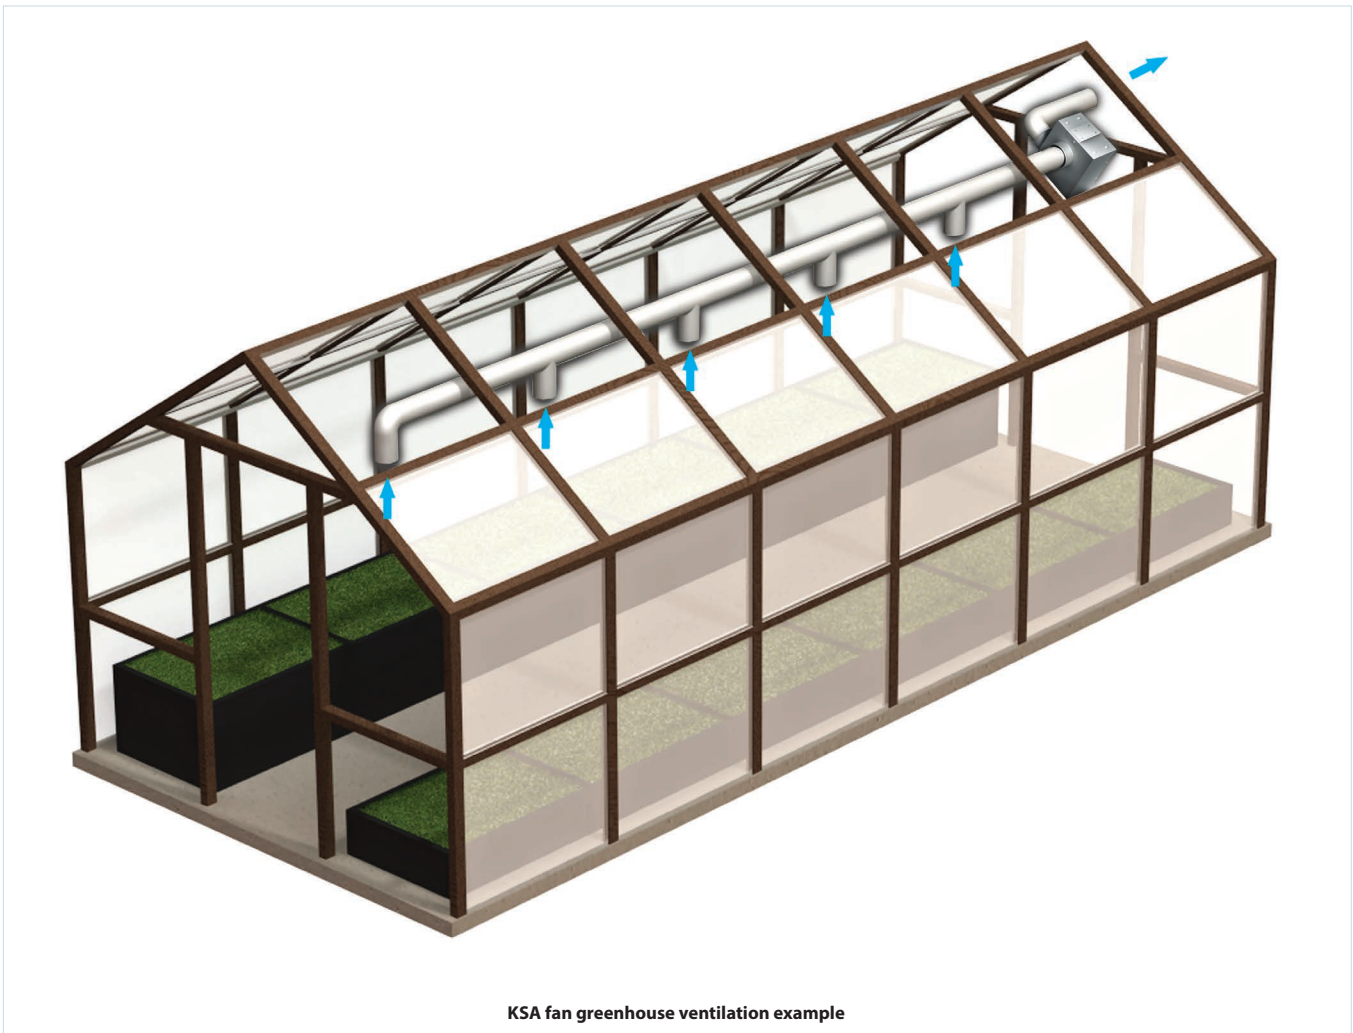

FAN SERIES VENTS KSA