

SYSTEM 90

Connectors


CEILING-MOUNTED PLASTIC CONNECTOR FLEXIVENT 0810125/90x2 FLEXIVENT 0812125/90x2

For supply and exhaust systems in residential premises.
For under-ceiling mounting with 125 mm duct downwards.
Connecting the ventilation grille to Ø 90 mm ducts.



- Connection diameters: 90 and 125 mm.
- Ducts are fastened with Flexivent 03 locks, purchased separately.
- The duct is fitted with a FlexiVent 0590 slip-on seal to retain air-tightness class "S" (available as an accessory).
- Made of polypropylene (PP) with thermoplastic elastomer (SEBS).
- Operating temperature: from -20 to +60 °C.

| Dimensions [mm] | Ø d (inner) | H1 | H2 | L | W |
|------------------------|-------------|-----|-----|-----|-----|
| FlexiVent 0810125/90x2 | 127 | 183 | 100 | 257 | 266 |
| FlexiVent 0812125/90x2 | 127 | 183 | 100 | 257 | 266 |

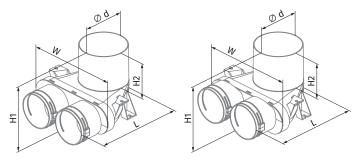

FlexiVent 0810125/90x2

FlexiVent 0812125/90x2

Accessories

FLEXIVENT 12125 PLENUM DUCT

For supply and exhaust systems in residential premises.
For extension of ducts of ceiling-mounted FlexiVent 0810125/90x2 and FlexiVent 0812125/90x2 plenums.



- Connection diameter: 125 mm.
- Made of polypropylene (PP) with thermoplastic elastomer (SEBS).
- Operating temperature: from -20 to +60 °C.



